

## Ultra-Low Power Sensor Module with Printed Sensor

The small form-factor, ultra-low power sensor module (ULPSM) produces a linear voltage output proportional to gas concentration. This module combines the novel sub-millimeter thin electrochemical sensor technology from SPEC Sensors, Inc. with an ultra-low power analog potentiostat circuit.



### Printed Sensor Features:

- Sub-millimeter thin electrochemical sensor technology
- Low-cost and high-performance
- Available for a variety of target gases.
- Additional sensors and configurations may be available, please contact us to discuss your application.

Target Gas	Max Range
Carbon Monoxide – CO	1000 ppm
Hydrogen Sulfide – H <sub>2</sub> S	50 ppm
Nitrogen Dioxide – NO <sub>2</sub>	20 ppm
Ozone – O <sub>3</sub>	20 ppm
Sulfur Dioxide – SO <sub>2</sub>	20 ppm
Ethanol – CH <sub>6</sub> O	1000 ppm

### ULPSM Features:

- Ultra-low power consumption
- Small form-factor gas sensor and analog front end
- Low-cost and easily replaceable
- Standard 8-pin connector for easy integration
- On-board temperature sensor
- Sensor headers allow replacement of the sensor

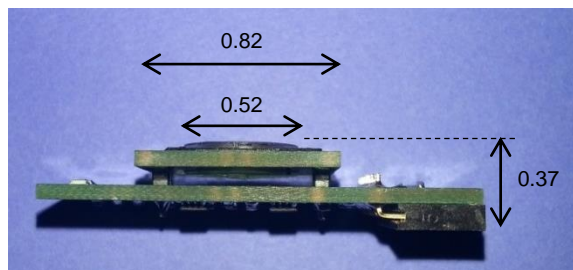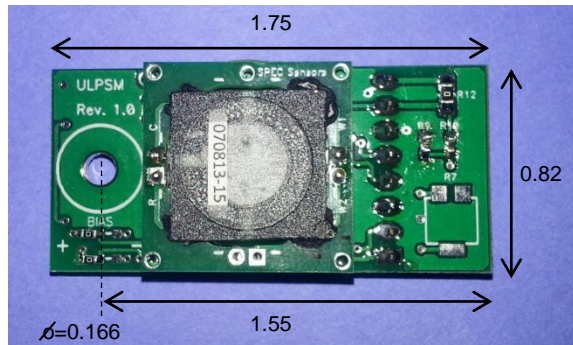

\*All dimensions in inches

### Evaluation Board Features:

- Plug header that replicates the suggested layout for user-implemented solutions.
- Screw terminals for easy connection to external circuits and measurement equipment.
- Jumper-selectable power supply options:
  - CR2032 coin battery (included).
  - External Supply: unregulated and unfused – do not exceed 3.3 V input.
  - External Supply: 3.0 V regulated – do not exceed 18 V input.
- Unity gain buffers for *Vref* and *Vtemp*.
- Insulating rubber feet.



**Device Connection:**

Electrical connections to the ULPSM are made via a rectangular female socket connector (Sullins Connector Solutions P/N: PPPC041LGBN-RC; recommended mate for host board: P/N: PBC08SBAN). This connector also provides mechanical rigidity on one end of the board. A through-hole or threaded standoff (Option -C) is located on the opposite end of the board to provide additional mechanical connection.

Pin #	ULPSM Function
1	<i>Vgas</i>
2	<i>Vref*</i>
3	<i>Vtemp</i>
4	( <i>SDA</i> )*
5	( <i>SCL</i> )*
6	<i>GND</i>
7	( <i>Vreg</i> )*
8	<i>V+</i>



\*Optional

*Vgas*: The voltage signal output that is proportional to the target gas concentration throughout the specified range. See **Calculating Gas Concentration** for more details.

*Vref*: The voltage signal output that may be used as a measurement reference for *Vgas*. The difference, *Vgas* - *Vref*, is independent of the input voltage, *V+*. See **Calculating Gas Concentration** for more details.

*Vtemp*: Voltage signal output that is proportional to temperature. See **Calculating Temperature** for more details.

*SDA*: Optional EEPROM I2C data line.

*SCL*: Optional EEPROM I2C clock line.

*GND*: Universal ground for power and signal.

*Vreg*: Optional voltage regulator output voltage. When the option is not included, *Vreg* = *V+*.

*V+*: Input voltage.

**NOTE:** *Vref* and *Vtemp* are high-impedance outputs. A unity gain buffer should be implemented between these pins and any measurement device, including voltmeters and analog-to-digital converters.

### Calculating Gas Concentration:

Sensors that pair with the ULPSM are calibrated at KWJ Engineering, Inc. The target gas concentration is calculated by the following method:

$$Cx = \frac{1}{M} \cdot (Vgas - Vref - Voffset),$$

where  $Cx$  is the gas concentration (ppm),  $Vgas$  is the voltage output gas signal (V),  $Vref$  is the voltage output reference signal (V),  $Voffset$  is a voltage offset factor, and  $M$  is the sensor calibration factor (V/ppm).  $M$  is provided on the calibration certificate that is shipped with the module.

Measuring  $Vref$  in-situ compensates for variations in battery or supply voltage, minimizing these effects on  $Cx$ . A difference amplifier or instrumentation amplifier can be used to subtract  $Vref$  from  $Vgas$ . Alternatively, when measuring  $Vref$  directly, always use a unity gain buffer. In lieu of measuring  $Vref$ , the nominal value may be utilized.

Once the sensor has been powered-on and allowed to stabilize in a clean-air environment (free of the analyte gas), the value of  $Vgas$  is nominally equal to  $Vref$ . The factor,  $Voffset$ , accounts for a small voltage offset that is caused by a normal sensor background current and circuit background voltage. For most applications,  $Voffset = 0$  is an adequate approximation. To achieve higher-precision measurements,  $Voffset$  must be quantified in a clean-air environment with the circuit in its final configuration.

### Calculating Temperature Compensated Gas Concentration:

A first-order temperature compensation may be implemented using the following method:

$$Cxc = \frac{1}{Mc} \cdot (Vgas - Vref - Voffset),$$

$$Mc = M \cdot (1 + Tc \cdot (20 - T))$$

where  $Cxc$  is the temperature compensated gas concentration (ppm),  $Mc$  is the temperature compensated sensor calibration factor,  $M$  is the sensor calibration factor,  $Tc$  is the temperature coefficient of span, and  $T$  is the measured temperature (°C).  $M$  and  $Tc$  are provided on the sensor specification sheet.

### Calculating Temperature:

Temperature (°C) may be calculated to  $\pm 3$  °C, within the range -10 °C to 50 °C, by using the theoretical relationship:

$$T = \left( \frac{87.0}{V+} \right) \cdot Vtemp - 18.0.$$